

**Cargo Doors One End Standard
Dry Freight ISO Cargo Container
20'(L) x 8'(W) x 8'6"(H)**

CNX-20ST
Cargo Doors One End Standard
20' X 8' 6" Dry Freight ISO Cargo Container

**USED CARGO WORTHY
U20ST**



**RECONDITIONED
R20ST**




**ONE WAY NEW
N20ST**



PRODUCT FEATURES

STANDARD FEATURES

- Corrugated steel sides, roof, and swing door on (1) end
- Two-way forklift pockets
- 1 1/8" thick marine plywood floors, forklift test to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. each (20 total) tested at 6,000 lbs.
- Corner castings (8 total)

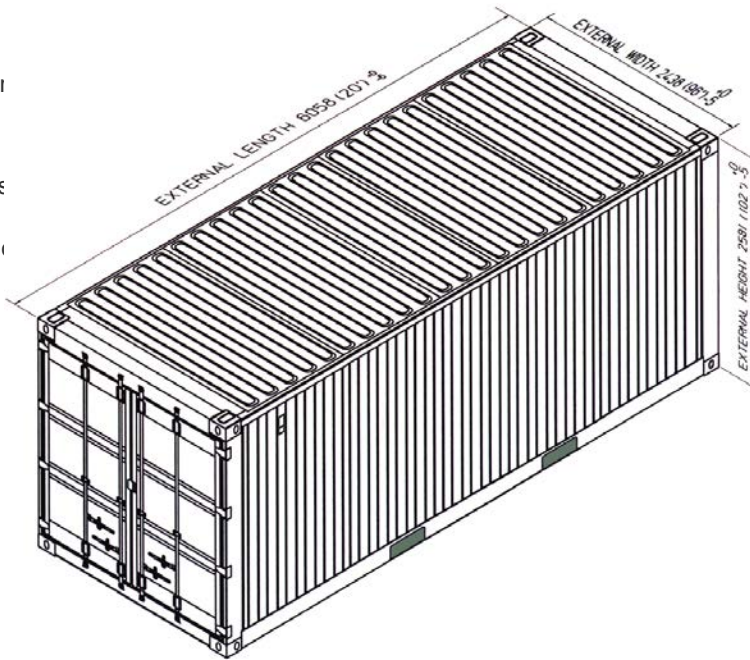

HIO # 336-0120.60

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

CX20ST	LENGTH (+0/-6)		HEIGHT (+0/-5)		WIDTH (+0/-5)		DOOR OPENING (+0/-5)	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
Ft. in.	19' 10 1/2"	19' 4 13/64"	8' 6"	7' 10 3/8"	8' 0"	7' 8 19/32"	7' 6 1/32"	7' 8 1/8"
Metric	6,058	5,898	2,591	2,397	2,438	2,352	2,287	2,340
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
Lbs.	4,780		48,130		52,910		1,176 Cu. Ft.	
Kgs.	2,170		21,830		24,000		33.3 Cu. M.	

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

20FT

ISO 9001

CERTIFIED QUALITY
MANAGEMENT SYSTEM

